


● BLAUPUNKT

User Manual

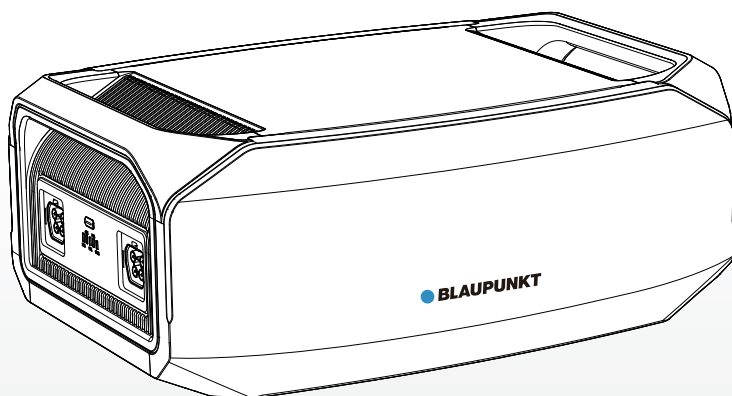

BAT4608

4608Wh Extra Battery

Contents

Product List	01
Product Description	02-03
Specifications	02
Overview	03
Instructions for Use	04
Connection Method	04
Gasoline Inverter Generator Charging	04
Error Code & Trouble Shooting	05
FAQ	06
FCC Warning	07

Disclaimer

Disclaimer

Before using this product, please read this user manual carefully to ensure that you fully understand the product and can use it correctly. After reading this user manual, please keep it in a safe place for future reference. Improper use of this product may cause serious injury to yourself or others, or result in product damage and property loss. By using this product, you are deemed to have understood, recognized and accepted all the terms and contents of this document. The Company shall not be responsible for any damages caused by the user's failure to use this product in accordance with this user manual.

In accordance with laws and regulations, the company reserves the right of final interpretation of this document and all documents related to this product. This document is subject to change, update, revision or termination without notice.

Please visit our website for the latest product information.

- The company shall not be held responsible for any damage caused by force majeure (e.g. fire, typhoon, flood, earthquake) or use under other abnormal circumstances by the customer.

Transportation

1. Do not subject this product to severe impacts, vibrations, or drops.
2. Do not carry this product onto a plane.

Environment

3. Keep the product away from water resources, heat resources, metal objects and chemical substances and dust environment.
4. Place the product on a stable and flat surface.
5. Store the product in a dry, well-ventilated place.
6. Follow the environment temperature requirements specified in the user manual.
7. Do not use the product in an environment with strong static electricity or magnetic fields.
8. Keep the product out of reach of children and pets.

Operation

9. Do not damage, repair, modify or disassemble this product by yourself.
10. Do not use any unofficial or not recommended components or accessories.
11. Remember to turn on the product before connecting your devices.

Disclaimer

- 12 .Always disconnecting your devices before turning off the product.
- 13 .Do not put fingers or hands into the product.
- 14 .Do not insert wires or other metal objects into the product to prevent short circuits.
- 15 .Do not use the product to power medical equipment and precision instrument.
- 16 .Do not stack any heavy objects on the product.
- 17 .Risk of Electric Shock: Never use the product to power tools to cut or access live parts or live wirings, or materials that may contain live parts or live wirings inside, such as building walls, etc.

Emergency

- 18 .If the product falls into water or gets wet, stop using it immediately and place the product in a secure, waterproof, and well-ventilated area, then contact customer service for further support.
- 19 .If the product is smoking or catches fire, it is recommended to use the fire extinguishers.
- 20 .If the product is overturned and severely damaged, wear insulating gloves to turn it off, and then place the product in an open area far from flammable materials and people, and dispose of it according to local laws and regulations.

Recycling and Disposal

- 21 .The product with severe damage, malfunction, or depleted battery life should be properly disposed of or recycled.
- 22 .The product contains batteries. Please dispose of the product following local laws and regulations for battery disposal and recycling. Do not dispose of it with household waste to avoid environmental pollution and safety hazards.
- 23 .If possible, ensure the battery is completely discharged (to 0% capacity) before disposing of the product. If not, refrain from placing the battery directly into a battery recycling box. Instead, contact a professional battery recycling company for proper handling.

Product List


⚡ APP

You can connect this product via APP to view information, control the device and personalize settings.


Scan the QR code to download our Smart Control APP.




What's in the Box



Extra Battery*1



Battery Expansion Cable*1



User Manual*1



Warranty Card*1


Product Description

⚡ Specifications

Extra Battery Port Output	42.65V~56.5V
Extra Battery Port Input	40V~56.5V
Battery Capacity	4608Wh (51.2V/90Ah)
Battery Type	LiFePO4
Working Temperature	32°F~104°F (0°C~40°C)
Storage Temperature	-4°F~140°F (-20°C~60°C)
Dimension	Approx. 24.79*16.24*9.92in (629.74*412.5*251.97mm)
Net Weight	Approx. 80.02lb (36.3kg)

Product Description


⚡ Overview

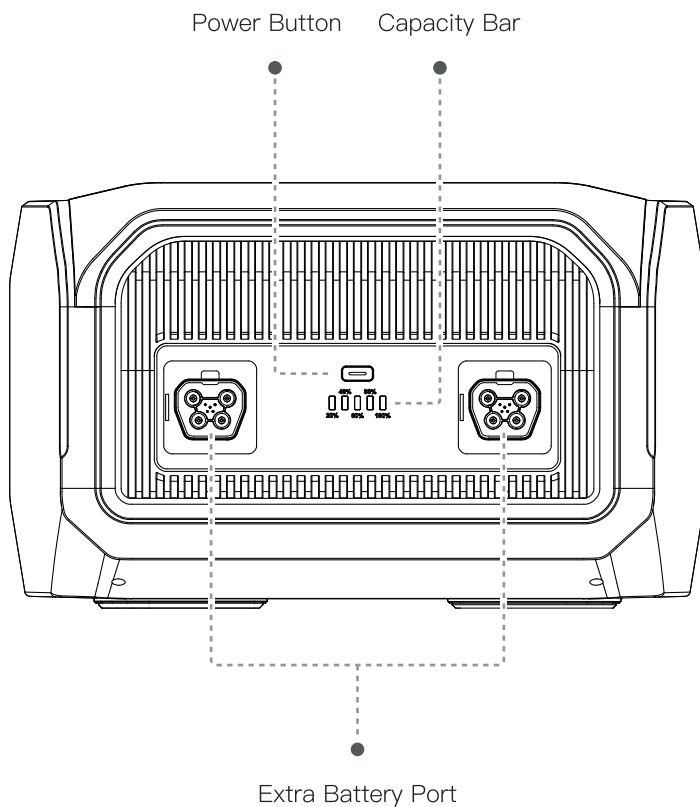

Instructions for Use


⚡ Connection Method

- 1 Turn off the extra battery and the power station before connecting or disconnecting them.
- 2 Use battery expansion cable to connect the extra battery to the power station.
- 3 Press and hold power button 3 seconds to turn the extra battery on.

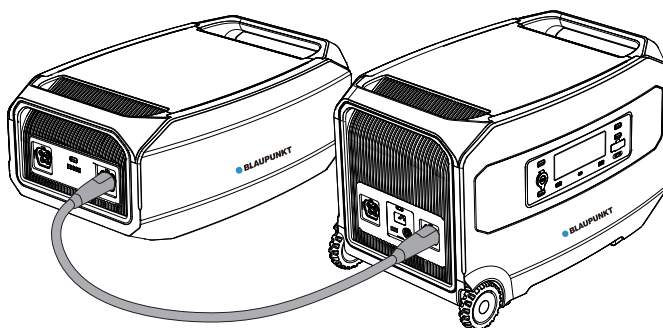

⚡ Gasoline Inverter Generator Charging

- 1 Turn off the extra battery and the generator before connecting or disconnecting them.
- 2 Use battery expansion cable to connect the extra battery and the generator, and refer to the generator's user manual before using the generator.

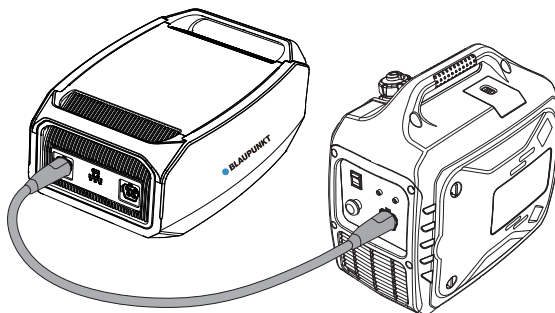

Error Code & Trouble Shooting

Error Code	Cause	Solution
E00	Over voltage of single battery cell.	Stop charging and discharge until the battery voltage returns to normal.
E01	Low Voltage of single battery cell.	Charge the device until the voltage returns to normal.
E02	Battery total voltage is too high.	Stop charging and start discharging until the battery voltage returns to normal.
E03	Battery total voltage is too low.	Charge the device until the voltage returns to normal.
E04	High temperature of battery.	The device will automatically return to normal when the temperature returns to normal.
E05	Low temperature of battery.	The device will automatically return to normal when the temperature returns to normal.
E06	Charge over temperature.	Charge the device after the temperature returning to normal.
E07	Over temperature of MOSFET.	The device will automatically return to normal when the temperature returns to normal.
E08	Connect the wrong expansion battery.	Connect correct extra battery to restore.

Note: The error content is only displayed on the APP. If problems persist, please contact service team for further support.

1.How to clean the product?

Please use a dry, soft, clean cloth or paper towel to gently wipe the product.

2.How to store the product?

Store it in a dry, well-ventilated place at room temperature. The recommended storage temperature is $-4^{\circ}\text{F}\sim 140^{\circ}\text{F}$ ($-20^{\circ}\text{C}\sim 60^{\circ}\text{C}$) and keep it away from water resources, heat resources, metal objects and chemical substances.

3.How to maintain the product?

- (1) Charge it to around 60% capacity and turn off the product before storing it.
- (2) For long-term storage, it is recommended to fully discharge and then fully charge the battery(0%–100%) once every 3 months.
- (3) And the warranty will be voided if the product has not been charged or discharged in 6 months.

4.Can this product be charged using a gasoline or diesel generator?



Yes, it can be charged with a generator that has a built-in pure sine wave inverter. The company will not be responsible for any product damage caused by using a generator without this feature.

5.Can this product be brought on board a plane?

No, this product cannot be brought on board a plane due to aviation regulations for lithium-based batteries.

6.How to place the product?

It is advised to place the product horizontally.



FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Notice:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- (1) Reorient or relocate the receiving antenna.
- (2) Increase the separation between the equipment and receiver.
- (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- (4) Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

